



محصول ما

کنترل پنل هوشمند

خانه هوشمند تهران
Tehran BMS.co






کنترل رنگ و شدت نور چراغ ها



کنترل دمای محیط

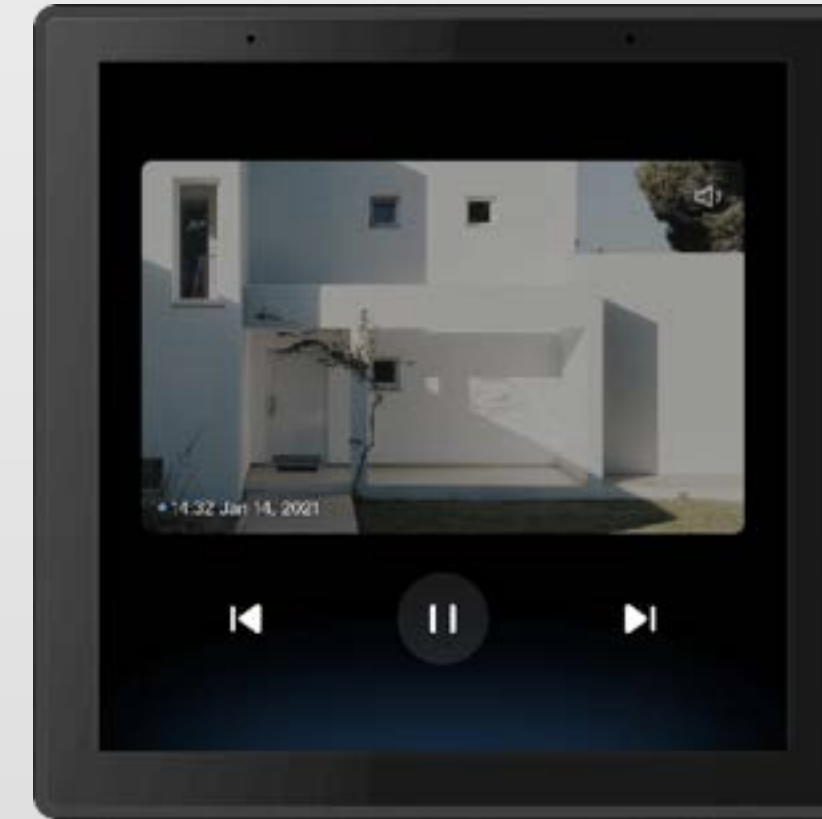

کنترل دوربین مدار بسته



کنترل آیفون تصویری




کنترل سیستم صوتی و تصویری



کنترل سناریو



کنترل ایمنی و امنیت

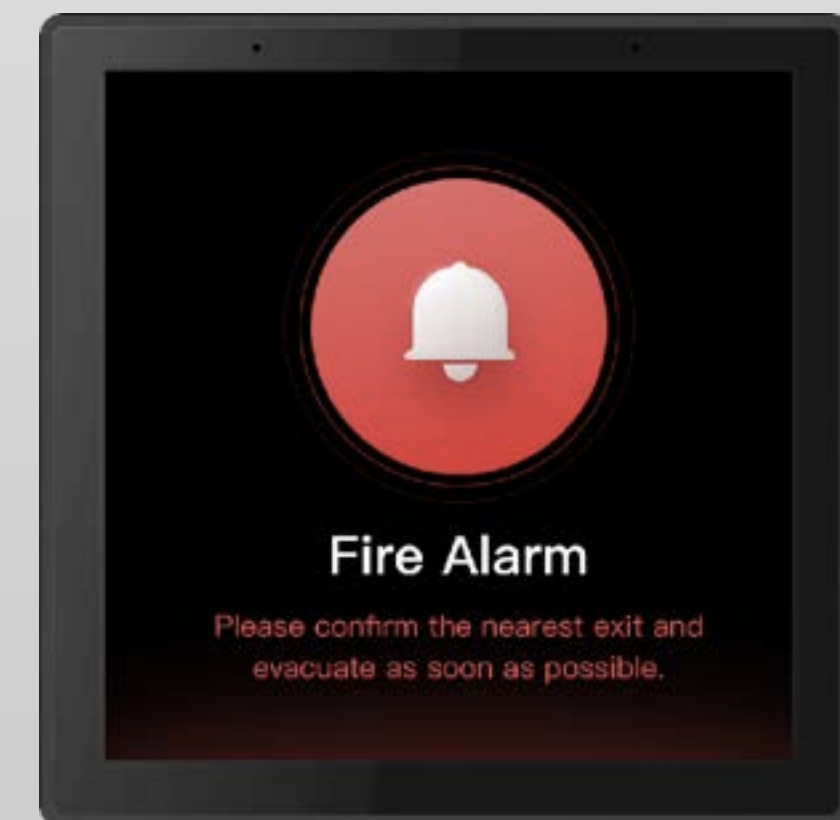

سیستم اعلام حریق



سرویس صوتی الکسا

پشتیبانی الکسا

با وجود پشتیبانی الکسا، پنل کنترل هوشمند می تواند فرمان های صوتی برای دستگاه های اینترنت اشیا (IOT) را اجرا کند، سناریوها را فعال کند، زنگ هشدار تنظیم کند، پیش بینی های آب و هوا را ارائه دهد، وضعیت ترافیک را اعلام کند و بسیاری قابلیت های دیگر را تشخیص دهد.





مشخصات فنی S6

Product sizes: 86mm x 86mm x 36.6mm

Touch screen size: 4"

CPU: Quad core Cortex-A35

Memory: RAM 2GB + ROM 8GB

Android OS 8.1

Built in speaker

Dual array microphones noise reduction

Ambient light sensor

Power input: AC 100V - 240V 50/60Hz

Ethernet port (General version)

Two way Relay output, load power $\leq 200W$ each way. (General version)



ارتباطات

WiFi 2.4GHz, 802.11b/g/n, 150Mbps

Tuya ZigBee 3.0, 802.15.4PHY/MAC


Bluetooth BLE 4.2

Integrated Tuya ZigBee gateway


Integrated Tuya Bluetooth gateway

Ethernet port (General version)




RS485 port (General version)



Wall sockets for
General version



Wall sockets for
EU version

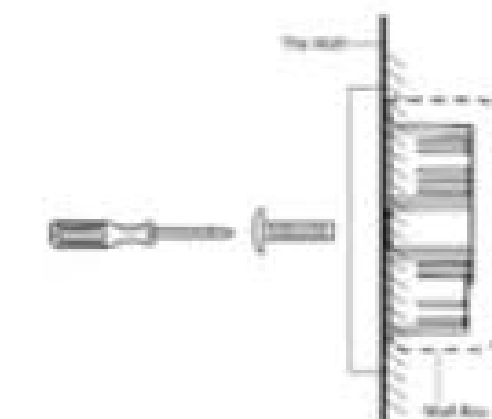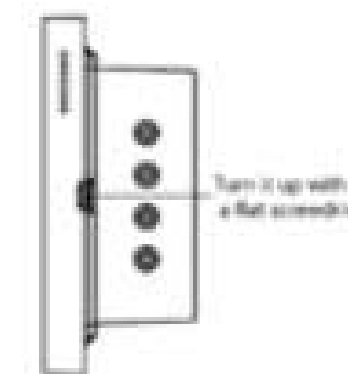



خانه هوشمند تهران
Tehran BMS.co



کنترل پنل هوشمند
6 اینچی

سیاه و سفید

خانه هوشمند تهران
Tehran BMS.co







آیتم های رنگ کلاسیک



رابط کاربری

خانه هوشمند تهران
Tehran BMS.co

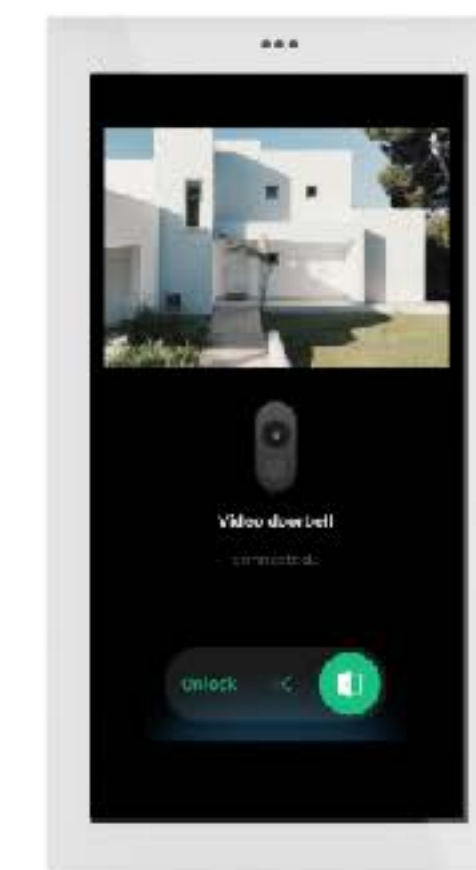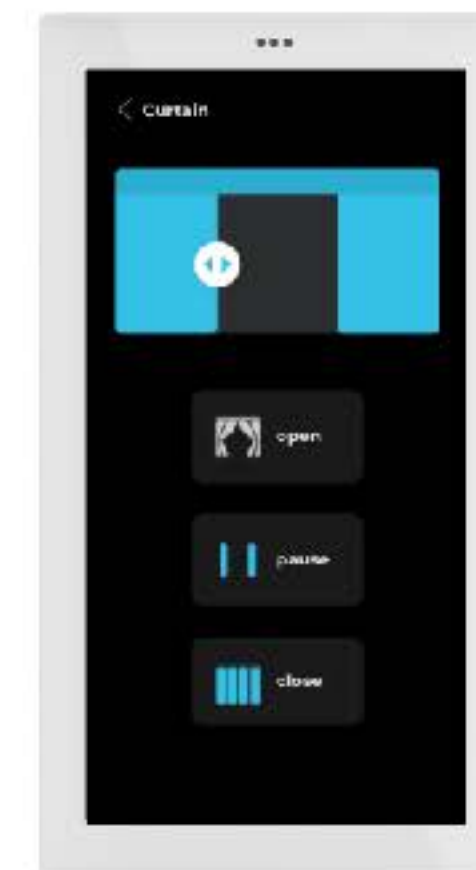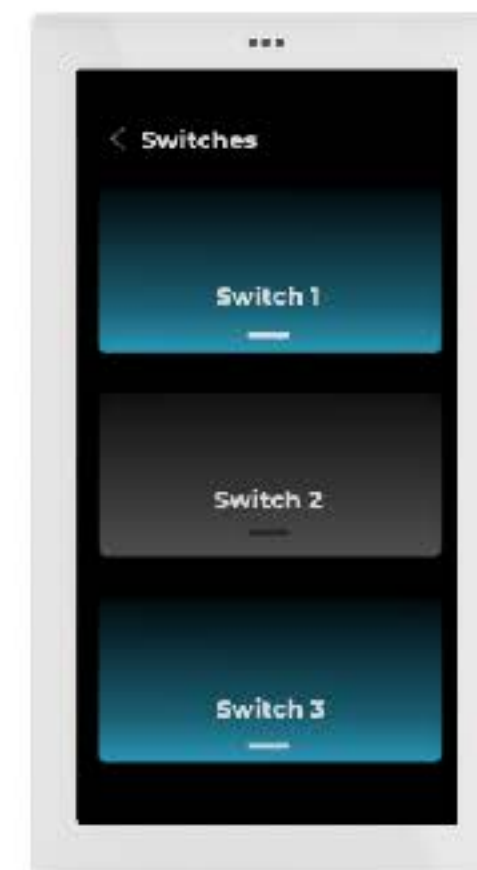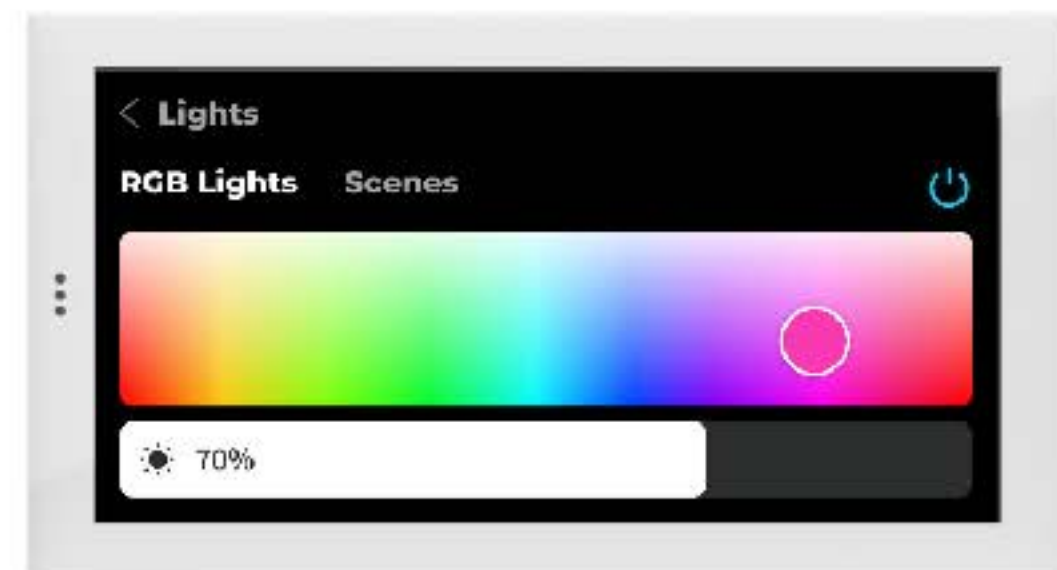

تنظیم شوندگی هوشمند





مشخصات فنی S1

Product sizes: 150mm x 81mm x 32mm
Touch screen size: 5.7"
Front glass + CNC Aluminium middle frame
CPU: Quad core Cortex-A35
Memory: RAM 2GB + ROM 8GB
Android OS 8.1
Sharp proximity sensor
Ambient light sensor
Gravity sensor
Built in 1W speaker
Dual array microphones noise reduction
Power input: DC 24V 0.5A or PoE

ارتباطات

WiFi 2.4GHz, 802.11b/g/n, 150Mbps
Tuya ZigBee 3.0, 802.15.4PHY/MAC
Bluetooth BLE 4.2
Integrated Tuya ZigBee gateway
Integrated Tuya Bluetooth gateway
Ethernet port (Support PoE)
Micro USB port (OTG)

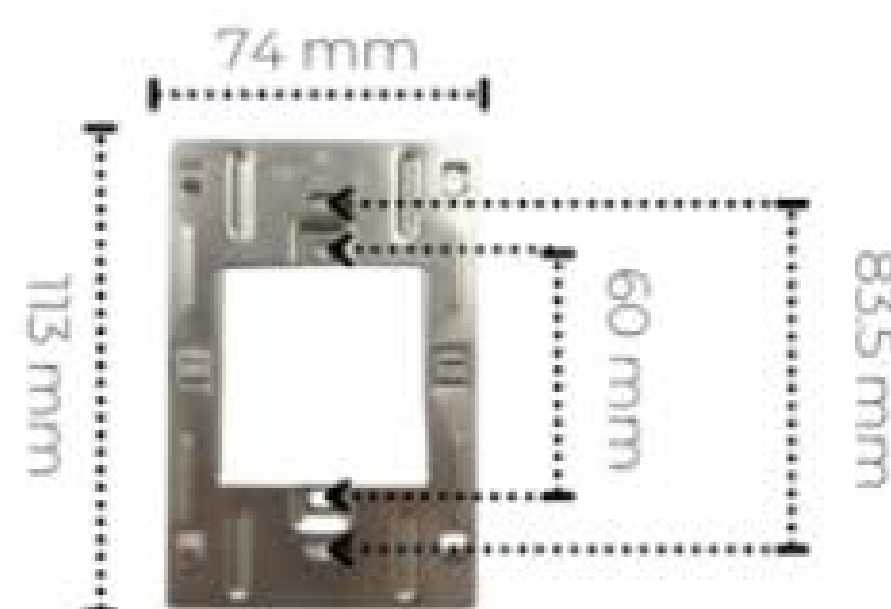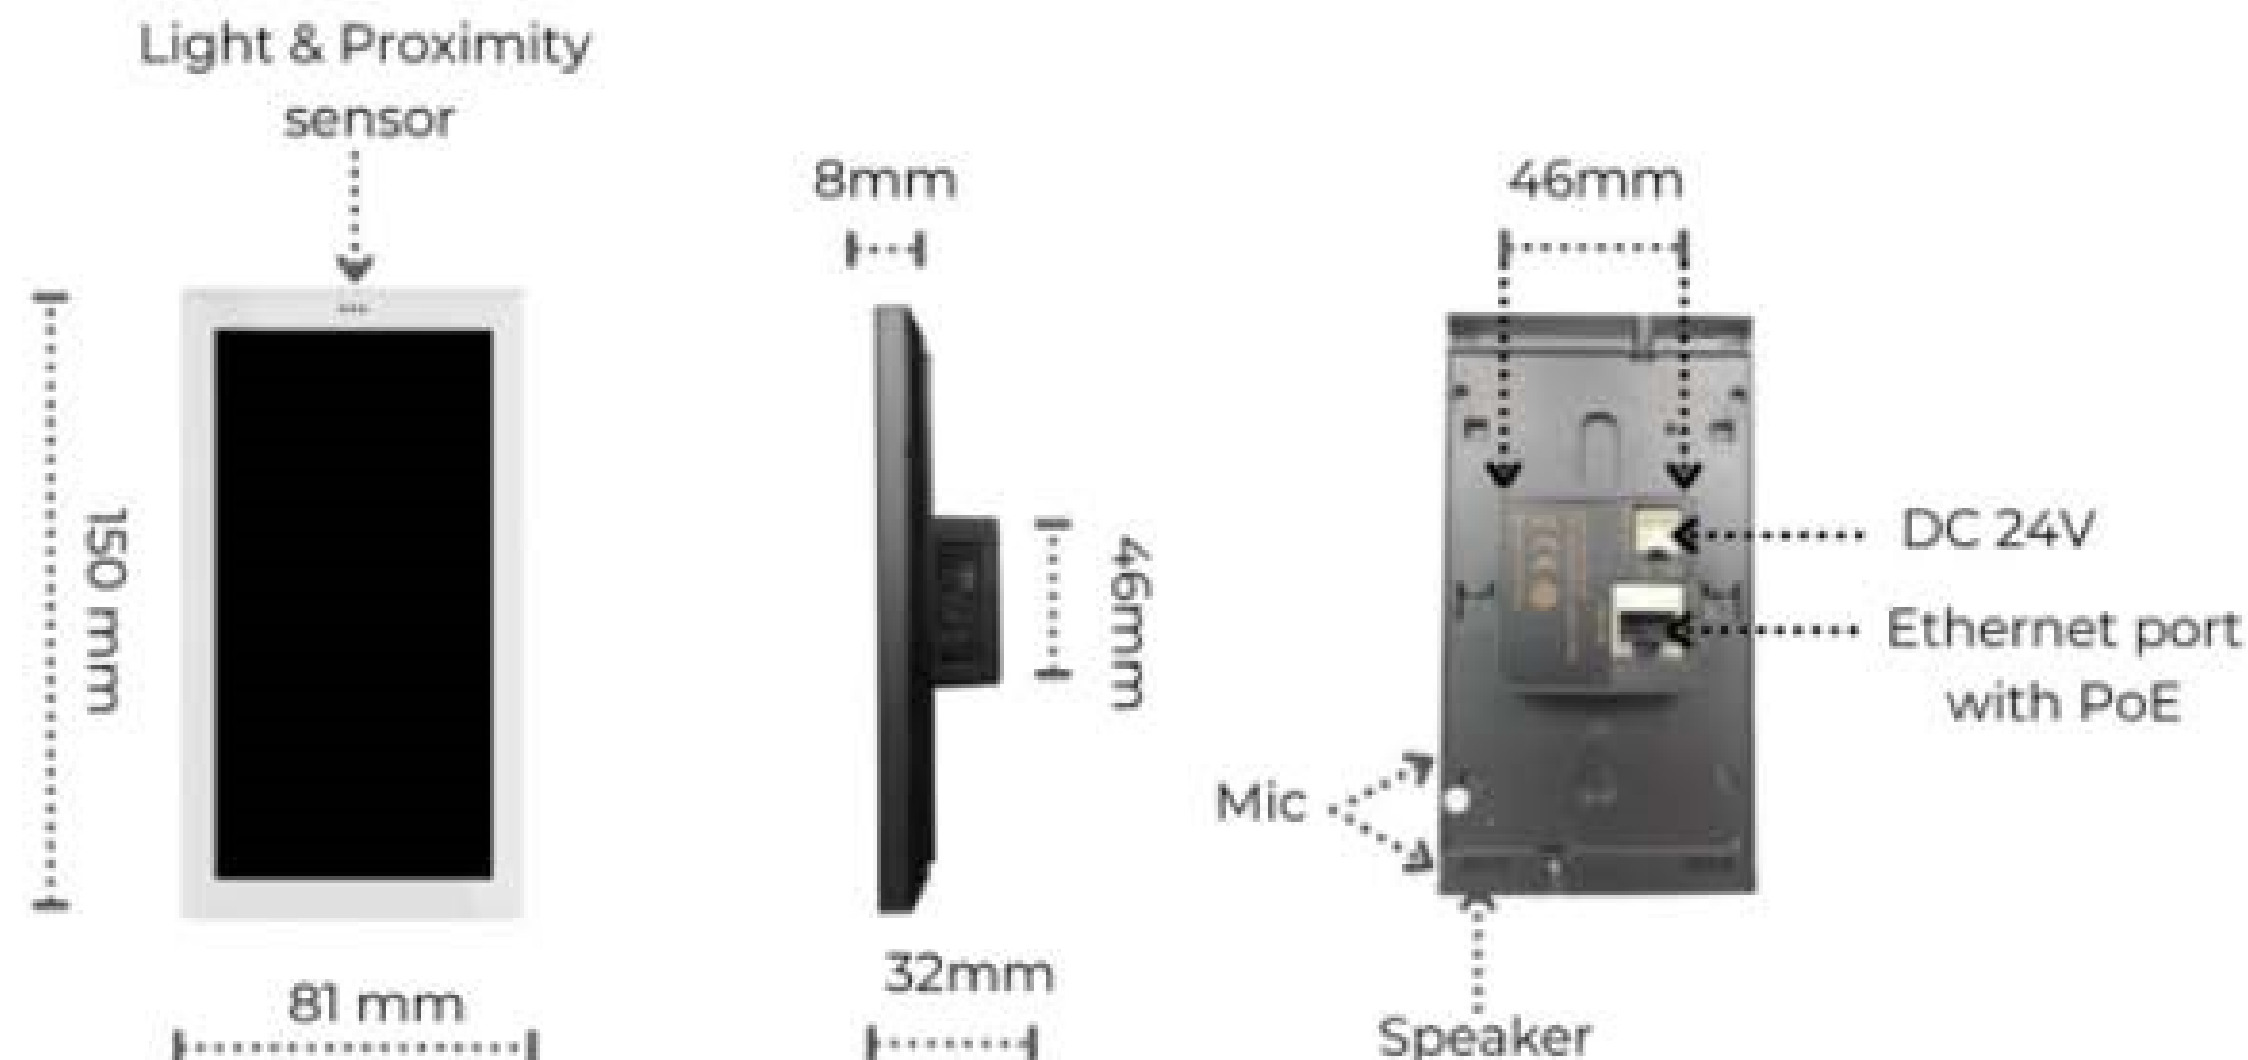

Stainless steel
Installation bracket



Compatible wall sockets




کنترل پنل هوشمند با ولوم چرخشی







دارای 3 نوع پایه پشتی استاندارد که با نیازهای مختلف بازارها تطابق دارد

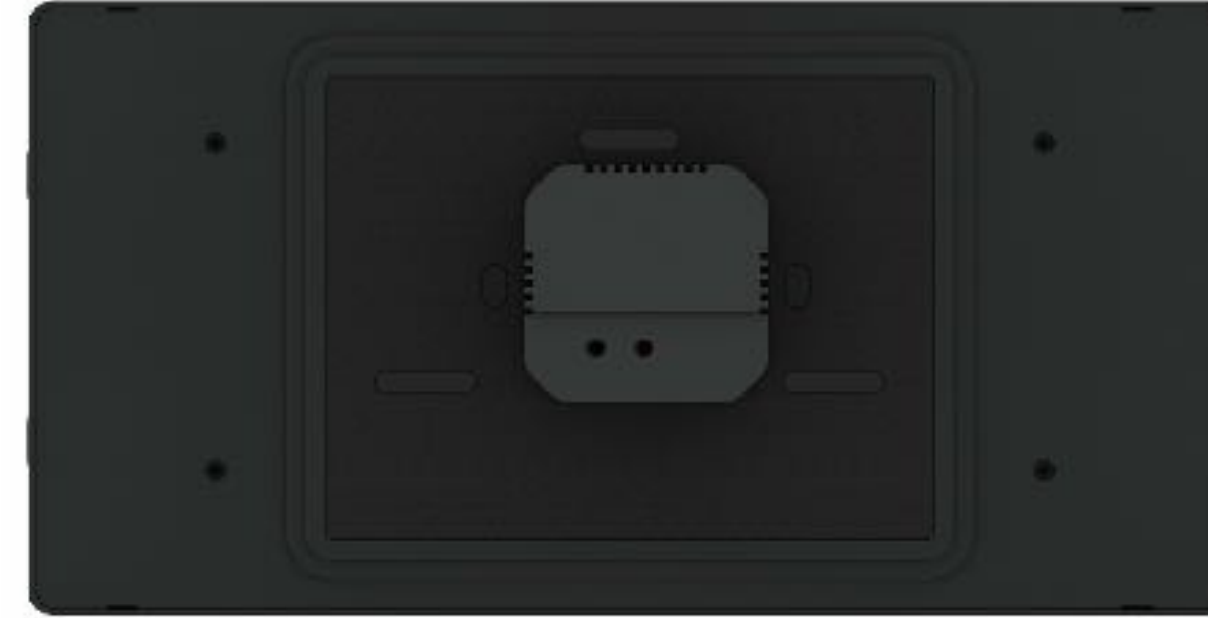

استاندارد اروپا

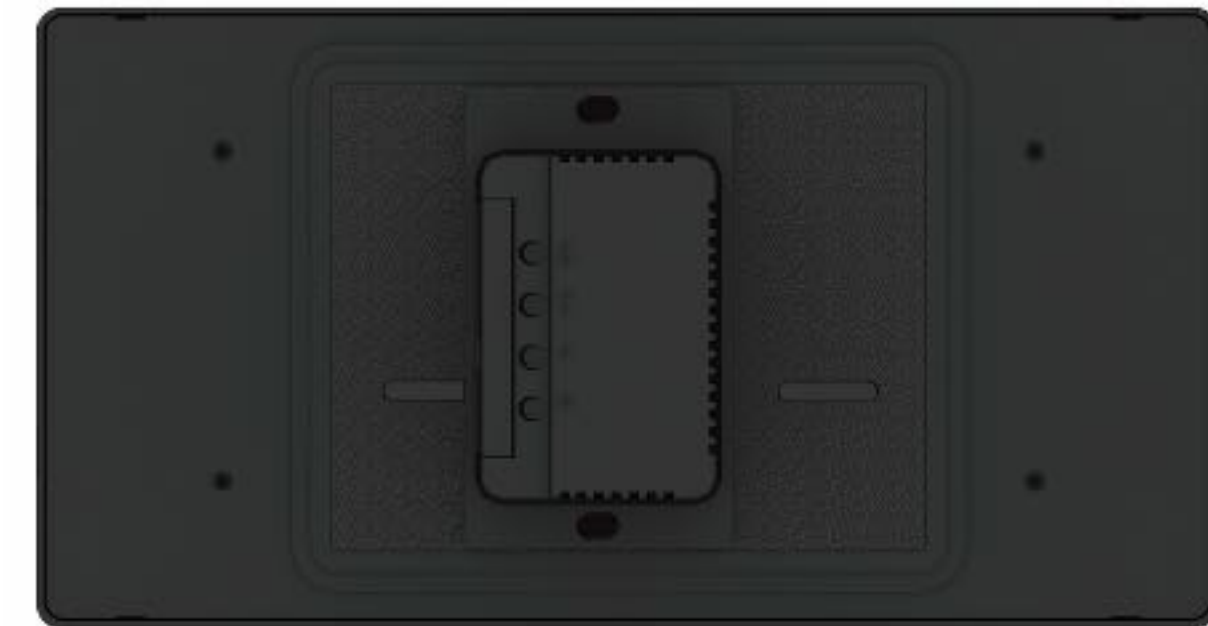

استاندارد آمریکا

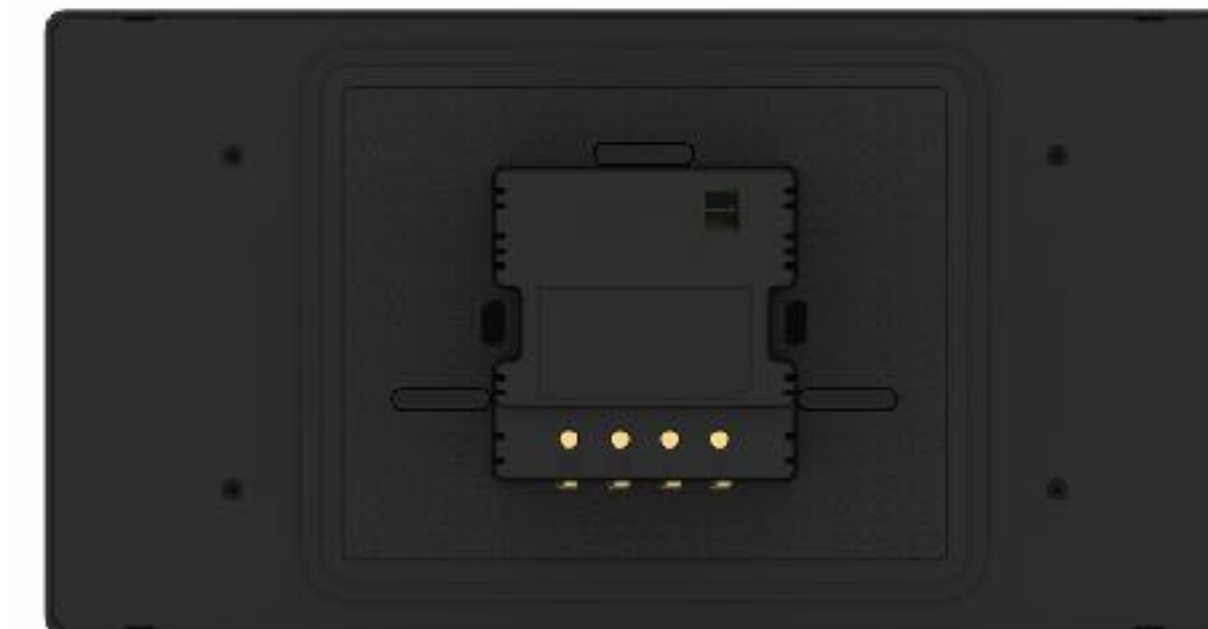

استاندارد آسیا



مشخصات فنی

CPU	Quad core Cortex–A35	OS	Android 11
Screen	8inch HD IPS Multi–touch screen, resolution 800 x 1280	RAM	2GB
Storage	16GB	WiFi	2.4G/5G (IEEE802.11a/b/g/n/ac/ax)
Bluetooth	BLE5.2 Single point	ZigBee	ZigBee 3.0 (Optional)
Touch Keys	2 x touch switches	Rotary Knob	Rotary knob with push button
Power input	AC 100–240V, 50/60 Hz	Power output	2 x Relay Circuits Max 200W Each (Optional)
Speakers	Built in 2*1W Mono speakers	Mic	2 Microphone Arrays with noise reduction
Sensor	Light sensor, Proximity sensor, Temperature &Humidity sensor	Ports	1 x USB Type C
Working Temperature	0°C to +40°C	Working Humidity	5% to 90%RH (Non–condensing)
Product dimensions	239x125x36mm(with the base) 239x125x11mm (without the base/ Outside the wall)	Net weight	961g



رویکردهای تعامل هوشمند

پاسخگوی انواع نیازهای
ارتباطی شما



آینه هوشمند


21.5"

آینه هوشمند M2

خانه هوشمند تهران
Tehran BMS.co



Installation

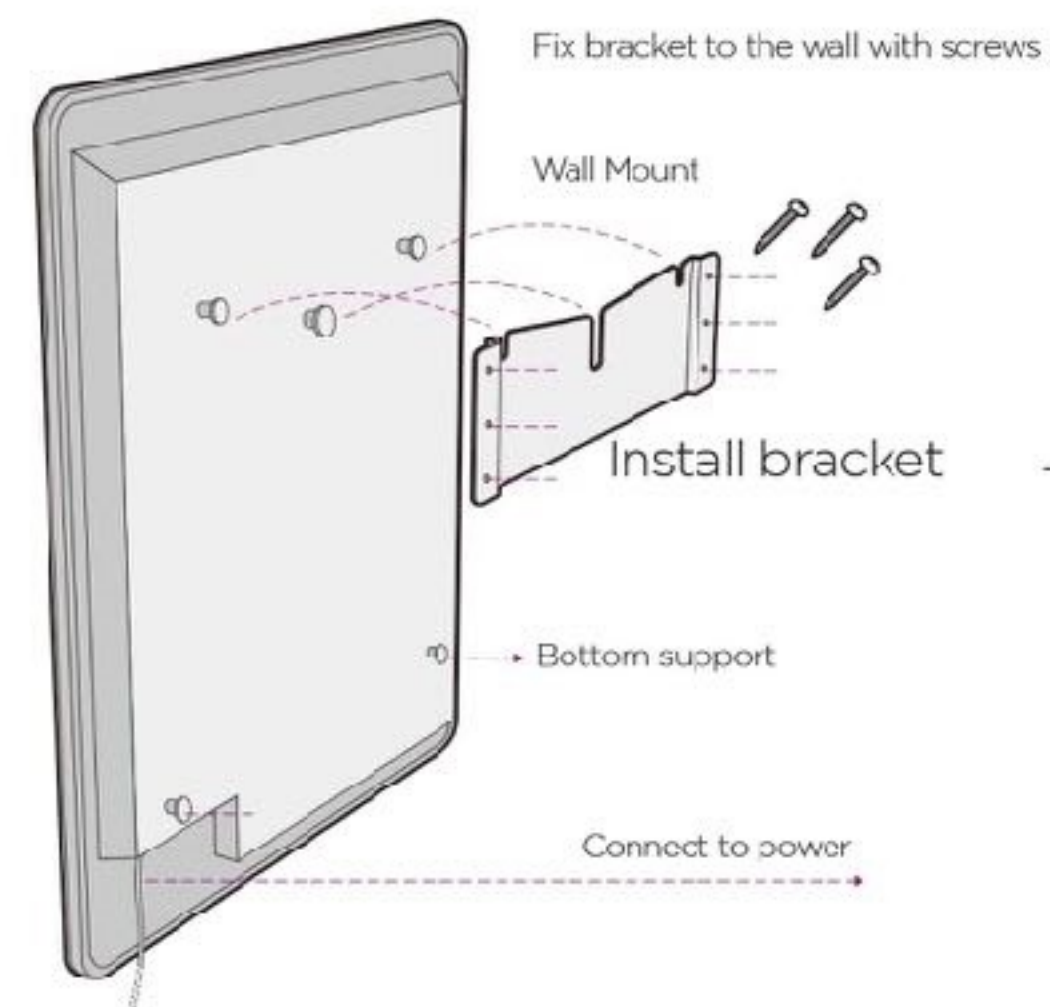

Flush Mount



Wall Mount




Customized Installation



Front View



Side View

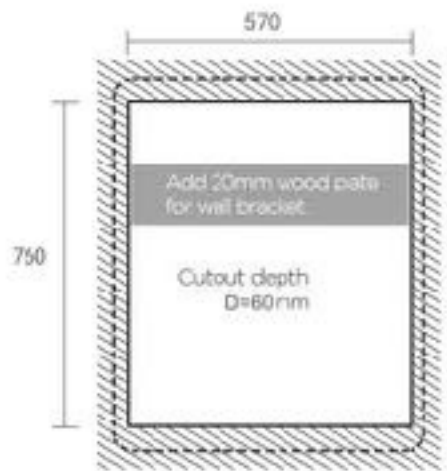

Wall Cutout



مشخصات

صفحه نمایش	
Display size	21.5"
Display type	IPS
Resolution	1920xR.G.Bx1080
Brightness	500cd/m2(Original LCD screen)
Contrast ratio	3000:1
Viewing angle	178° (H)*170° (V)
Response time	18ms
Work life	≥25000H
تنظیمات	
CPU	Quad coreCortex 1.8G Hz
RAM	2GB
ROM	8GB / 16GB
LAN	100 Mbps Ethernet
Wifi	2.4G IEEE 802.11 b/g/n
Bluetooth	4.0
OS	Android 11
Speaker	2*3W
Touch screen	Yes(2 points and more)
Power ON/OFF(touch)	Yes
Motion Sensor	0~80cm
MIC	Array dual mic
رابط ها	
USB(OTG)	1
LAN	1

مصرف انرژی	
Power input	AC 100-240V 0.8AMax 50/60Hz
Consumption	≤36W
Standby	≤1W
ابعاد/مواد/فرآیند ساخت	
General size	800X600mm
Thickness	25mm
Mirror panel	Coated silver mirror
Material/Process	Metal wall bracket, aluminum frame and etc..
Waterproof level	IPX4
    	
    	

10"

آینه هوشمند مدل M2G



خانه هوشمند تهران
Tehran BMS.co





مشخصات

صفحه نمایش		مصرف انرژی	
Display size	10.1 inch	Power input	DC 12V 4A
Display type	IPS	Consumption	≤48W
Resolution	1920*1200	Standby	≤1W
Contrast ratio	1000:1	رابط ها	
Brightness	650cd/m ² (Original LCD screen)		
Viewing angle		ابعاد/مواد/فرآیند ساخت	
Response time	160° (H) * 160° (V) 30ms		
تنظیمات			
CPU	2.0GHz A75*2 + 1.8GHz A55*6	General size	800mm(H)x600mm(W)
GPU	Mali-G52	Thickness	35mm
RAM	4GB	Mirror panel	Coated silver mirror
ROM	32G	Material/Process	Metal housing and Aluminum frame
Camera	No	Gross weight	13.7 kg
WIFI	Double frequency 2.4/5GHz IEEE 802.11a/b/g/n/ac	Net weight	9.6 kg
Bluetooth	Bluetooth 5, Bluetooth Smart	Package dimension	930*740*170mm
LED lighting	Yes	    	
Anti-fog film	Yes		
Speaker	2*3W	    	
Touch screen	Yes(5 points)		
Voice Assistant	Yes		
OS	Android 11		



طراحی آینه هوشمند روی درب کابینت






آینه هوشمند با چراغ های LED





کلیدهای دیواری هوشمند

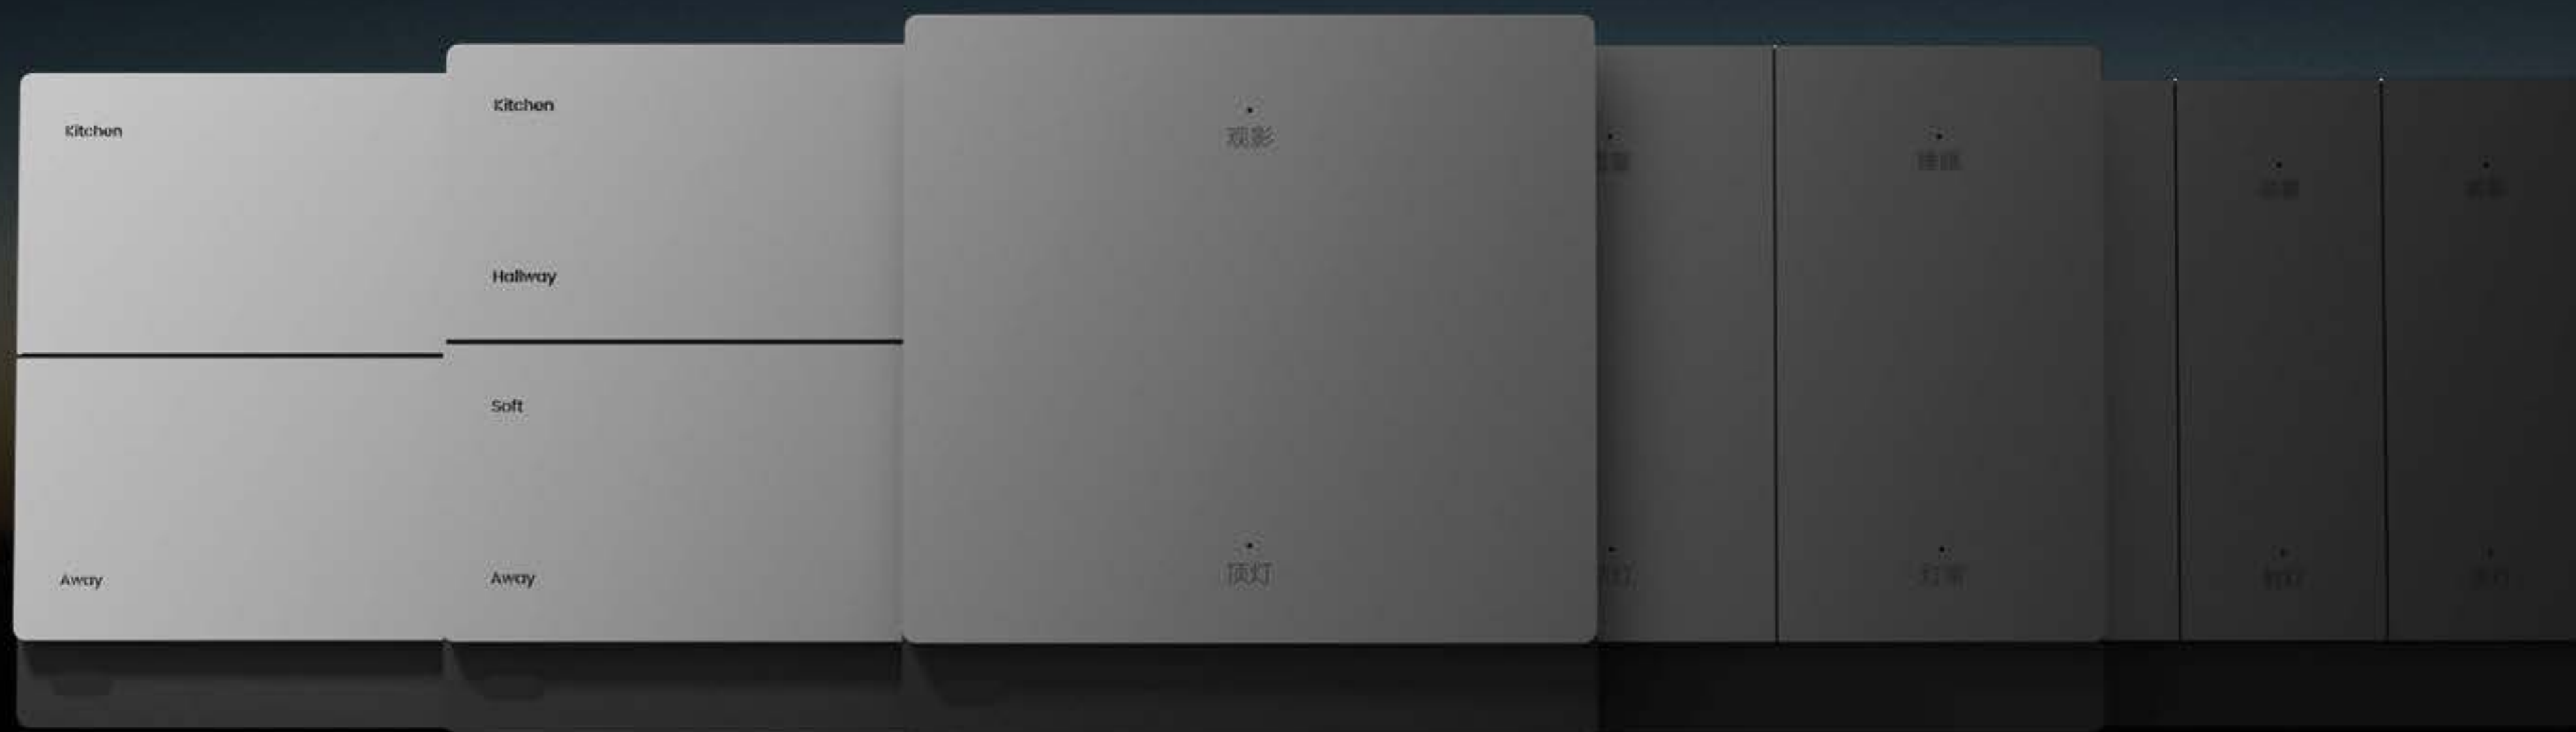





میکروسوئیچ



حسگر مجاورت و نور



نشانگر نور پس زمینه



کنترل سناریو





زندگی هوشمند، تلفیق هنر و شکوه

سه رنگ متنوع مطابق با انواع
دیوارها و جلوه های زیبایی
شناختی منحصر به فرد

طلایی نقره ای خاکستری





کنترل سناریو wireless +مدار رله 4 دکمه/8 دکمه حالت افقی

Product size: 86*90*33.5mm

Rated voltage: 100-240V, 50/60Hz

Product material: Aluminium (the buttons)

+ Plastic (the base)

Control methods: Microswitch, App remote control


Single load: $\leq 800W$

Total load: Max 1600W (3 relays maximum)

Working temperature: $-10^{\circ}C \sim 40^{\circ}C$

Working humidity: $\leq 95\%RH$, no condensation

Wiring method: Live and Neutral lines required

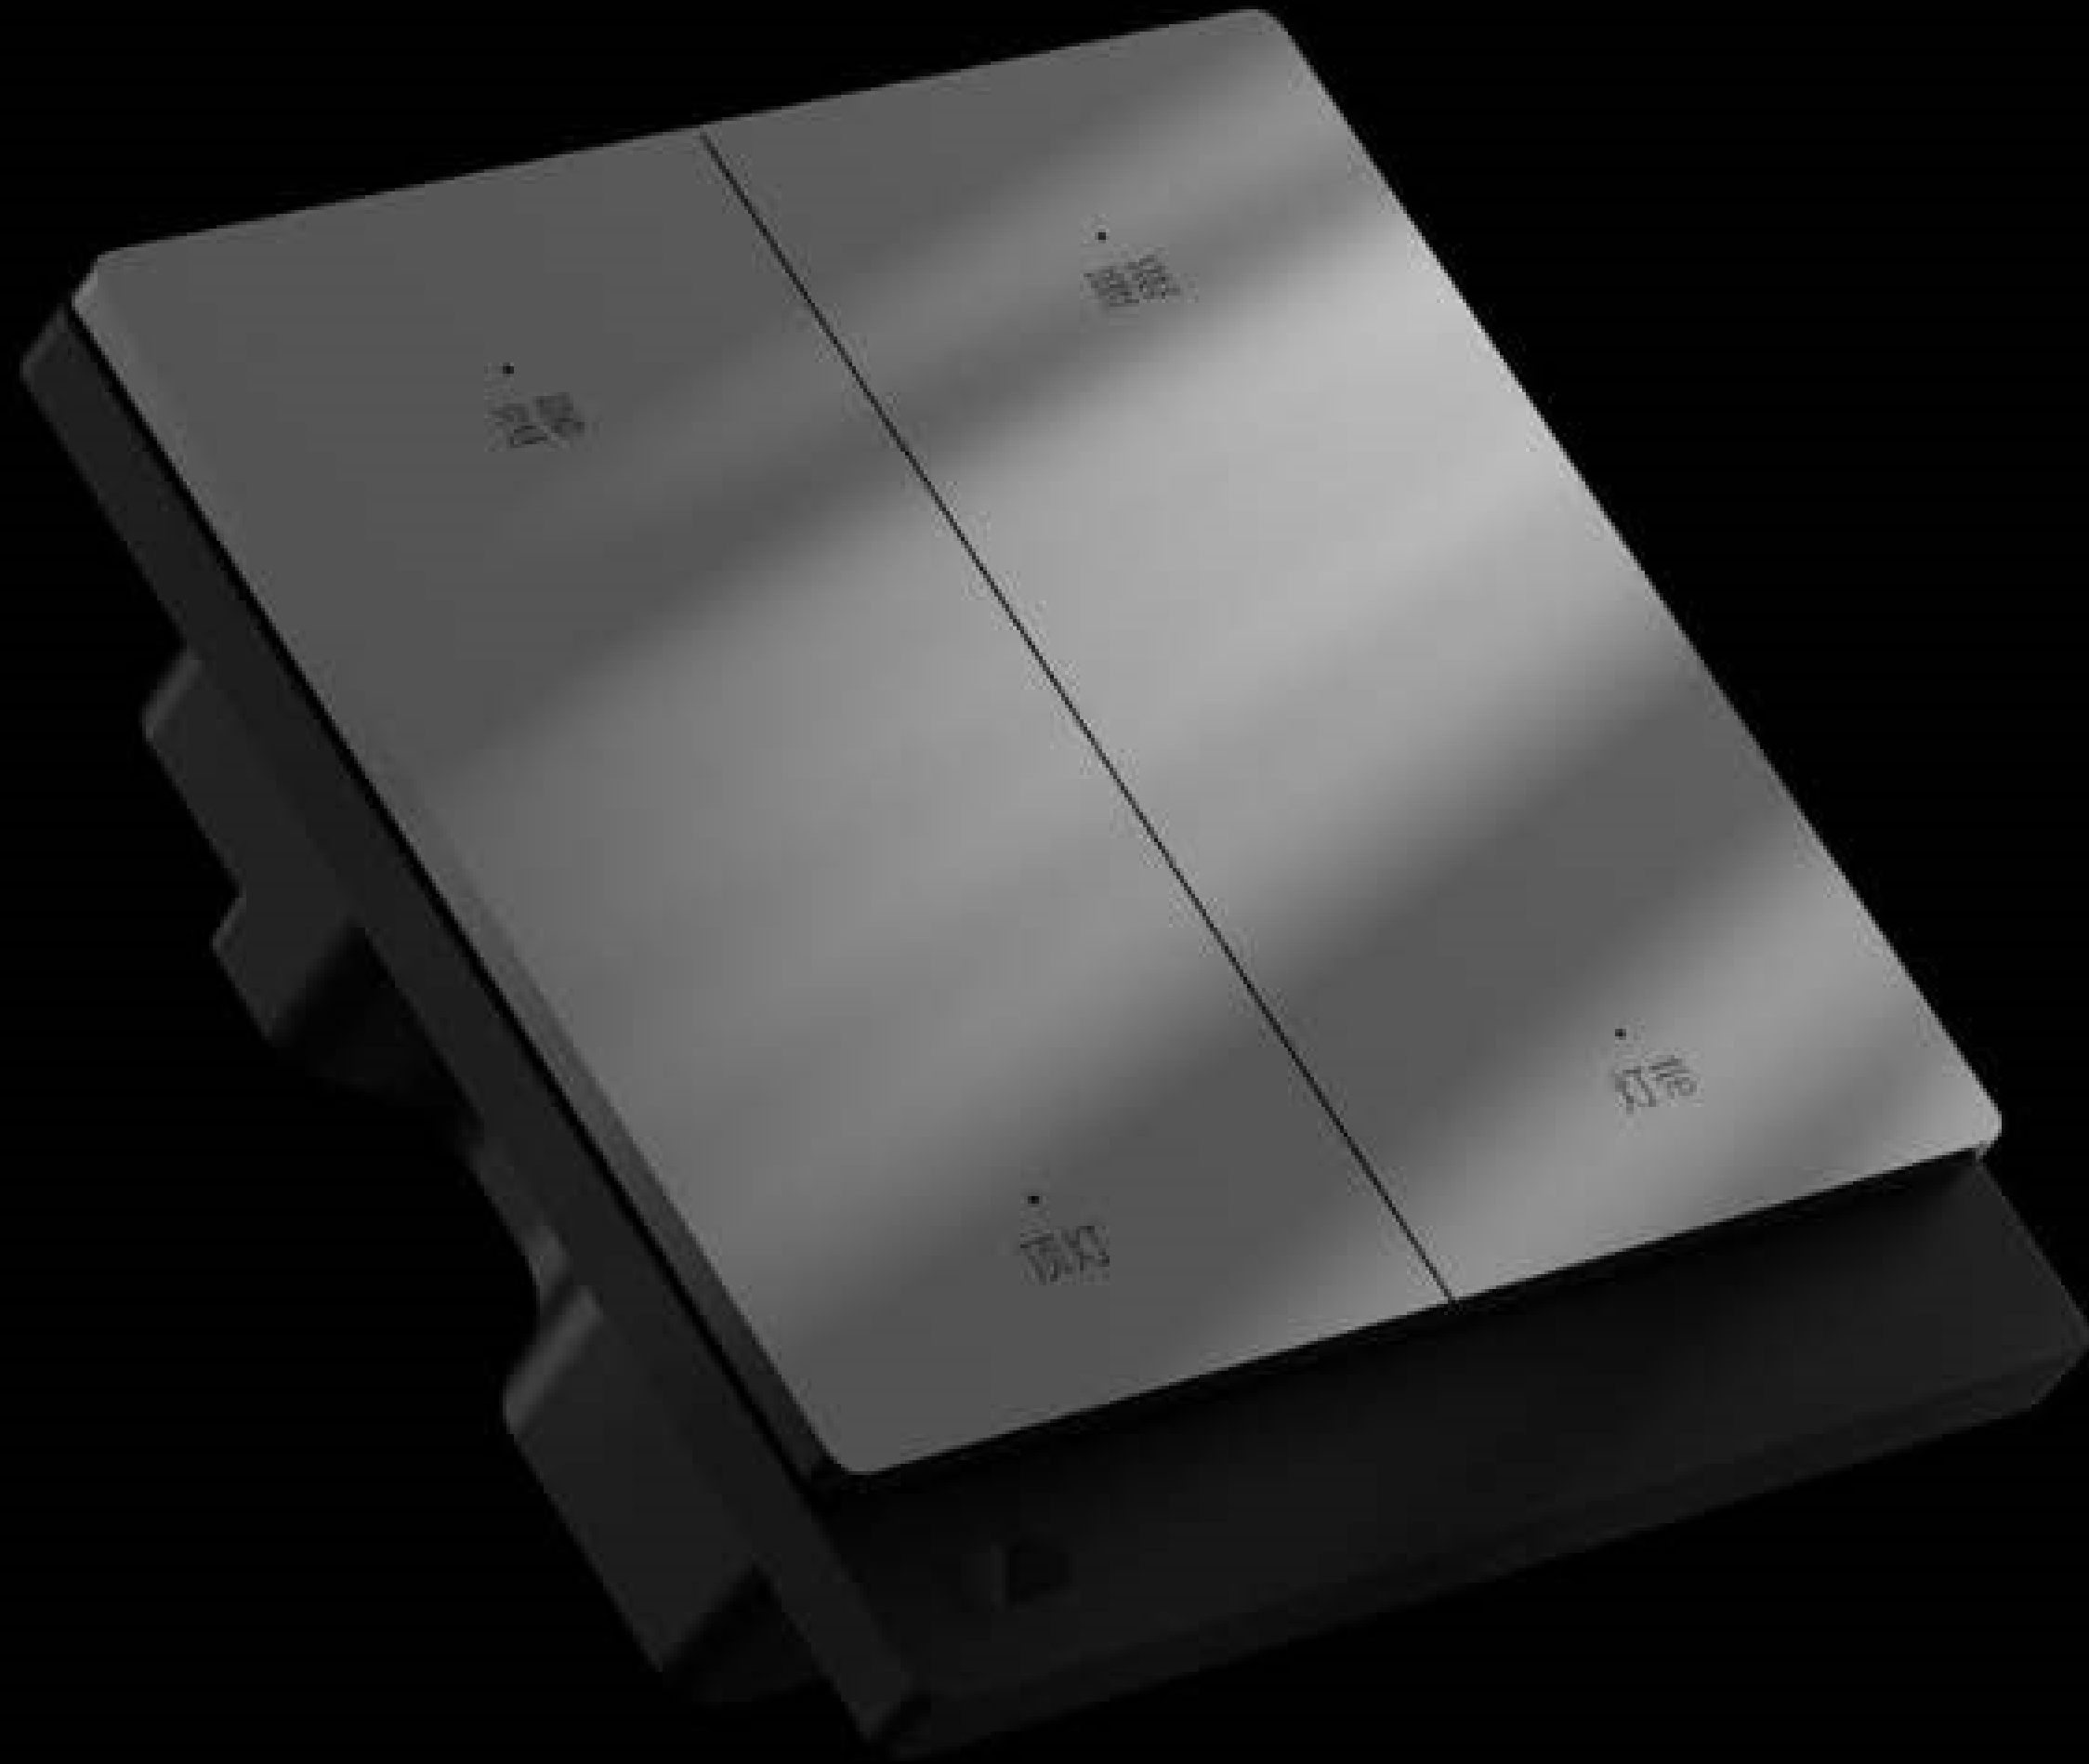

کنترل سناریو wireless +مدار رله 2 دکمه / 4 دکمه / 6 دکمه حالت عمودی

Product size: 86*90*33.5mm

Rated voltage: 100-240V, 50/60Hz

Product material: Aluminium (the buttons) + Plastic (the base)

Control methods: Microswitch, App remote control


Single load: $\leq 800W$

Total load: Max 1600W (3 relays maximum)

Working temperature: $-10^{\circ}C \sim 40^{\circ}C$

Working humidity: $\leq 95\%RH$, no condensation

Wiring method: Live and Neutral lines required

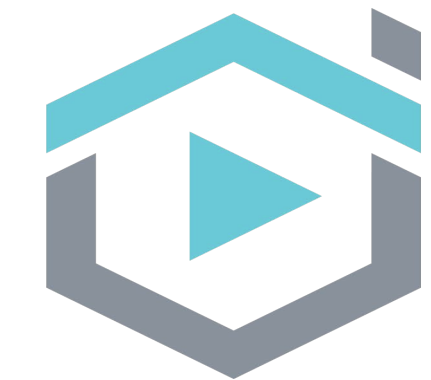


رابط مرکزی دیواری



- ZigBee 3.0 wired gateway, support 10/100M Ethernet
- Wall-mount installation, the same product family with the scene switches
- Long distance communication and high stability
- 24mm ultra-thin base for easy installation

کلیدها و پریزها

خانه هوشمند تهران
Tehran BMS.co

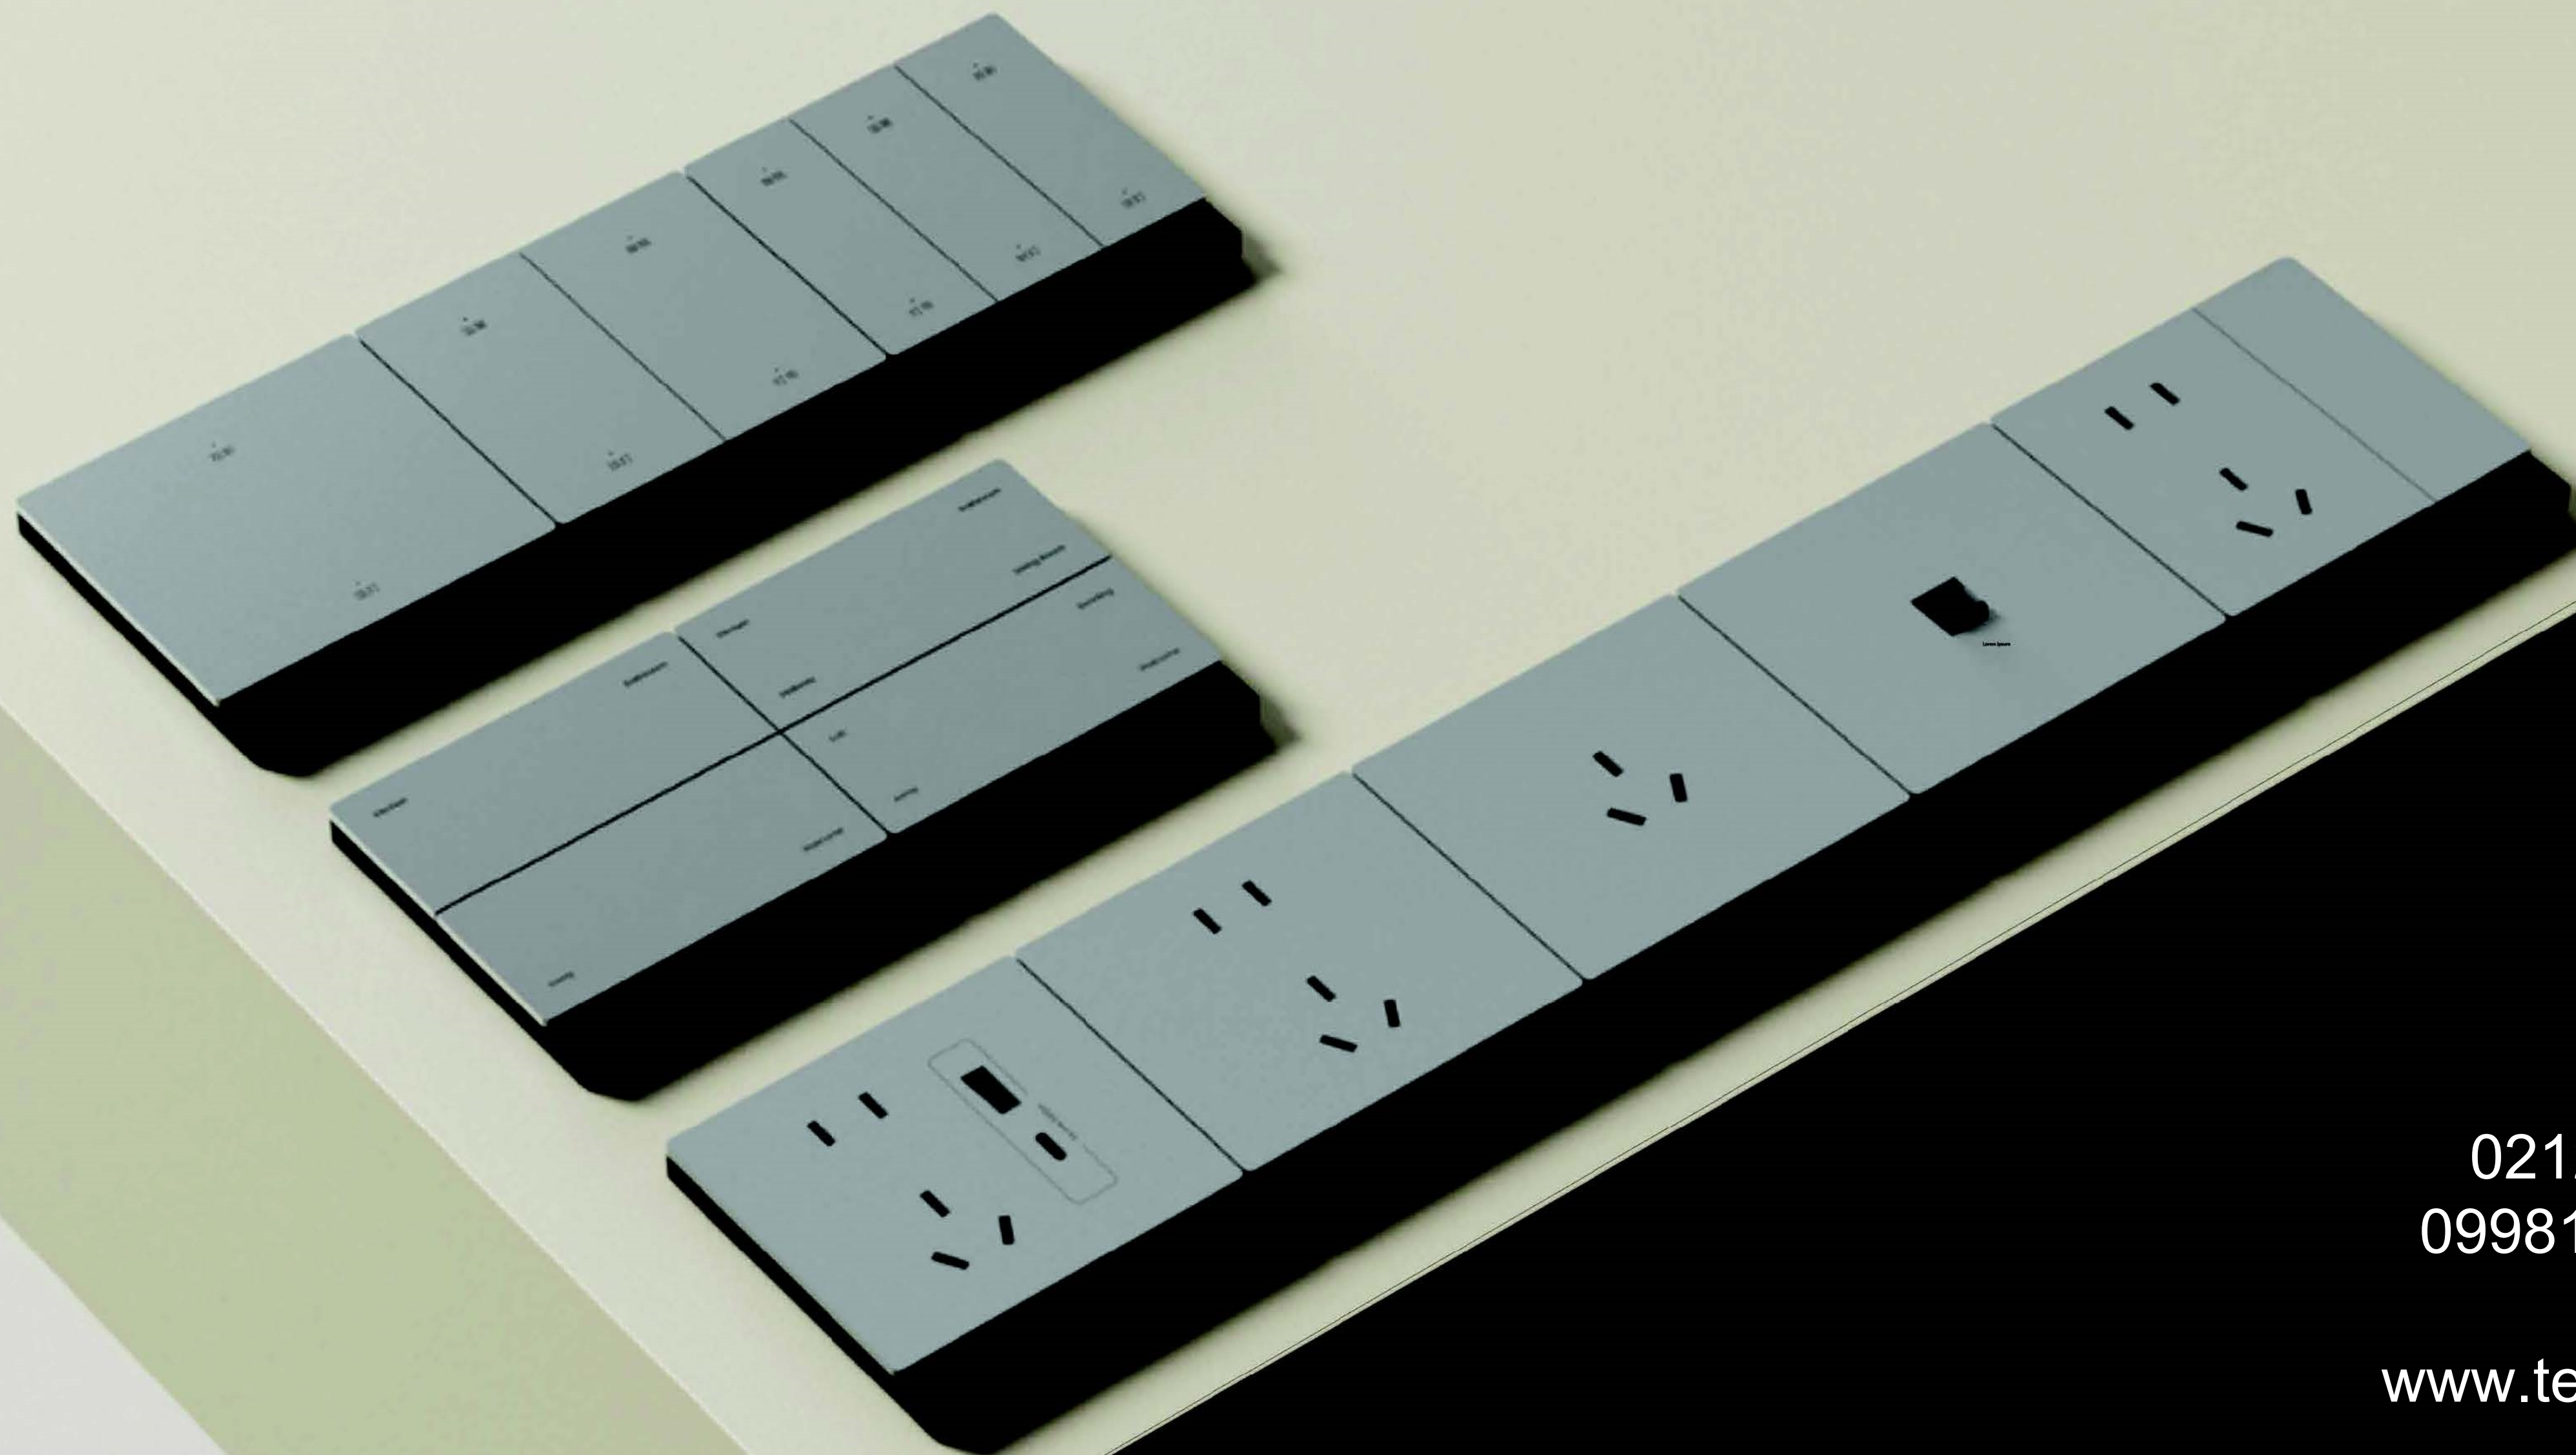

ارتباط با ما

تلفن: 02126852391

موبایل: 09981144266

آدرس سایت:

www.tehranbms.com